



Fast assembly concealed hinge

- ▶ Sensys thin door hinge, door thickness from 10 mm
- ▶ Opening angle 110°, drilling pattern TH 52 x 5.5 mm

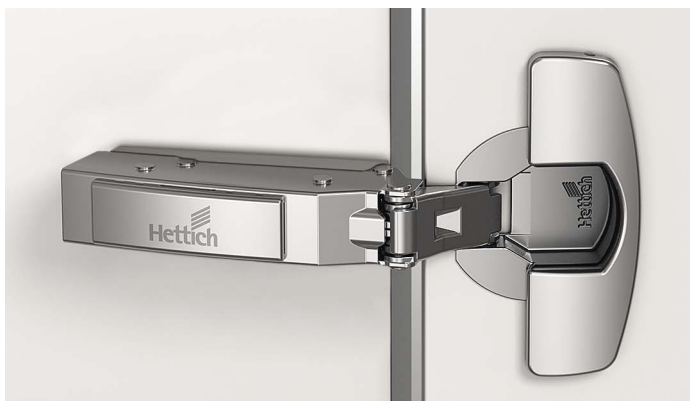


- ▶ Quality classification under EN 15570, Level 3
- ▶ For door thickness 10 - 19 mm
- ▶ Cup depth 7.8 mm
- ▶ Integrated overlay adjustment +2 mm / -2 mm
- ▶ Integrated depth adjustment +3 mm / -2 mm
- ▶ Height adjustment at mounting plate
- ▶ Steel nickel plated


Drilling pattern




full overlay (Base B 12.5 mm)



half overlay (Base B 3 mm)



inset (Base B -4 mm)



With integrated Silent System, with self closing feature (Sensys 8646i)

Cup assembly	Mounting hole $\varnothing \times T$ mm	full overlay	half overlay	inset
		50 ea.	50 ea.	50 ea.
For screwing on	-	9 094 270	9 094 280	9 094 290
For pressing in	$\varnothing 10 \times 8$	9 094 271	9 094 281	9 094 291
with expanding sockets	$\varnothing 10 \times 8$	9 094 276	9 094 286	9 094 296

Without Silent System, with self closing feature (Sensys 8646)

Cup assembly	Mounting hole $\varnothing \times T$ mm	full overlay	half overlay	inset
		50 ea.	50 ea.	50 ea.
For screwing on	-	9 094 360	9 094 370	9 094 380
For pressing in	$\varnothing 10 \times 8$	9 094 361	9 094 371	9 094 381
with expanding sockets	$\varnothing 10 \times 8$	9 094 366	9 094 376	9 094 386

Without Silent System, without self closing feature, for handleless applications (Sensys 8676)

Cup assembly	Mounting hole $\varnothing \times T$ mm	full overlay	half overlay	inset
		50 ea.	50 ea.	50 ea.
For screwing on	-	9 094 450	9 094 460	9 094 470
For pressing in	$\varnothing 10 \times 8$	9 094 451	9 094 461	9 094 471
with expanding sockets	$\varnothing 10 \times 8$	9 094 456	9 094 466	9 094 476