



# Grooving System




**240 X TREME**

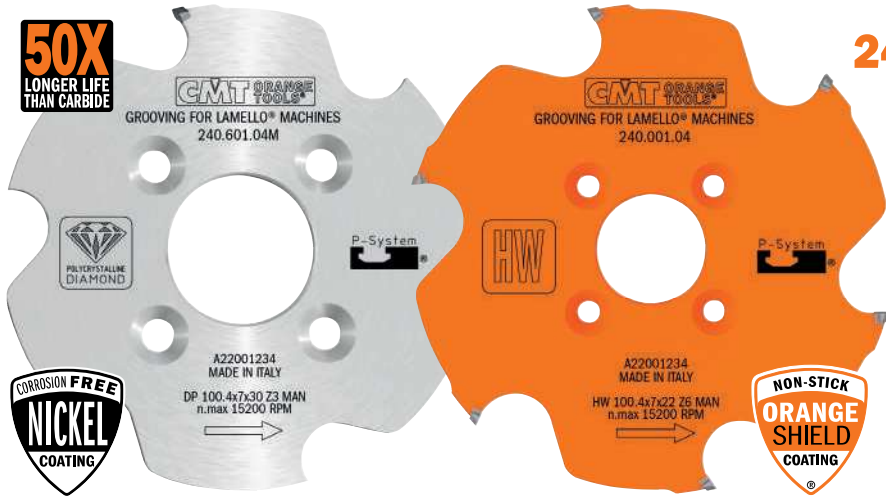

**WOOD**

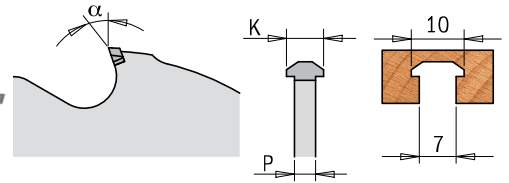


### Applications

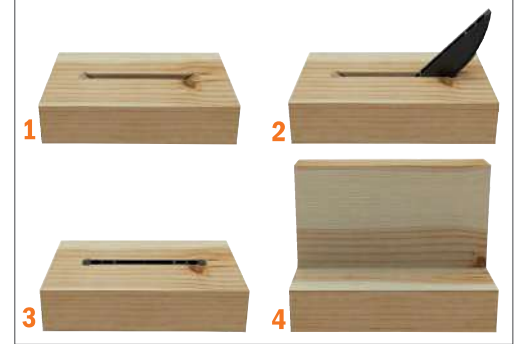

### Machines



### Materials

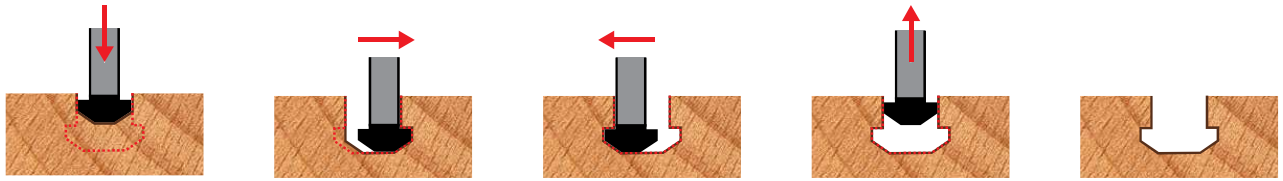

| D mm  | B mm | TEETH MATERIAL | MACHINE          | PIN HOLE       | Z | K mm | P mm | $\alpha$ | $\beta$ | COATING TYPE  |    | ORDER NO.   |
|-------|------|----------------|------------------|----------------|---|------|------|----------|---------|---------------|----|-------------|
| 100,4 | 22   | HW             | LAMELLO® ZETA P® | 4/4,5 - 9,5/36 | 6 | 7    | 4    | 20°      | TCG     | ORANGE SHIELD | 10 | 240.001.04  |
| 100,4 | 22   | DP             | LAMELLO® ZETA P® | 4/4,5 - 9,5/36 | 3 | 7    | 4    | 20°      | TCG     | NICKEL        | 10 | 240.601.04  |
| 100,4 | 30   | DP             | CNC              | 4/6,6 - 12/48  | 3 | 7    | 4    | 20°      | TCG     | NICKEL        | 10 | 240.601.04M |


# Biscuit Joiner



**240-241 INDUSTRIAL**




**WOOD**

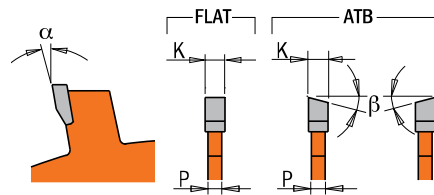

### Machines



### Applications



### Materials



| D mm | B mm | PIN HOLE       | Z | K mm | P mm    | $\alpha$ | $\beta$ |    | ORDER NO.    |
|------|------|----------------|---|------|---------|----------|---------|----|--------------|
| 100  | 22   | 4/4,5 - 9,5/36 | 6 | 3,96 | 3,0     | 18°      | 10°ATB  | 10 | 240.006.04   |
| 100  | 22   | 4/4,5 - 9,5/36 | 8 | 3,96 | 3,0     | 15°      | 10°ATB  | 10 | 240.008.04   |
| 100  | 22   | -              | 8 | 3,96 | 3,1-3,8 | 15°      | FLAT    | 10 | 241.008.04 ● |

● Ideal for VIRUTEX®